

# RF Power Transport

*Stefan Choroba*

DESY, Hamburg, Germany

## **Abstract**

This paper deals with the techniques of transport of high power RF from an RF power source to the cavities of an accelerator. Since the theory of electromagnetic waves in waveguides and of waveguide components is very well explained in a number of excellent text books it will limit itself on special waveguide distributions and on a number though not complete list of special problems which sometimes occur in RF power transportation systems.

## **1 Introduction**

The task of an RF power transportation system in an accelerator is to transport the RF power generated by an RF power source to the cavity of an accelerator. Sometimes it is necessary to combine the power of several RF sources and very often it is necessary to transport the power to not just one cavity but a number of cavities. It is usually the aim to transport the power with high efficiency and high reliability.

Different types of transportation systems can be considered. Parallel wires or strip lines can be used to transport electromagnetic waves, but they can not be used for high power RF transport because of their low power capability due to radiation into the environment or electrical breakdown above a certain power level. Coaxial lines and hollow waveguides can be used to transport high power RF. Coaxial lines are used at lower frequencies up to some 100MHz and power of some 10kW. Hollow waveguides typically are used for frequencies above some 100MHz, power levels of more than some 10kW up to several 10MW and distances of several meters. Coaxial lines are used at these parameters only for short distances or when efficiency does not play the key role. This is due to losses in the inner conductor of the coaxial line, losses in the dielectric material or breakdown between the inner and outer conductor of the coaxial line at high power level. There is of course no sharp line when to use coaxial lines or hollow waveguides. Although coaxial lines are in use at accelerators the next sections will concentrate on hollow waveguides since they are used in a larger number of applications.

## **2 Theory of electromagnetic waves in waveguides and of waveguide components**


The theory of electromagnetic waves in waveguides and of waveguide components can be found in a number of excellent text books [1-4], school articles[5-6] or school transparencies [7], of which some are listed in the reference. Therefore the theory will not be repeated here.

## **3 Waveguide distributions**

Waveguides distributions are combinations of different waveguide components. They allow for power transport, combination and distribution of RF power. In addition they protect the RF power source from reflected power and allow for adjustment of RF parameters like amplitude, phase or  $Q_{\text{ext}}$ . Distributions can be complicated assemblies and sometimes different options exist to fulfil certain requirements.


The size of the waveguide is at first determined by the RF frequency. It is then still possible to choose between two standard sizes. For the transport of RF power at e.g. 1.3GHz one can consider WR650 or WR770 waveguides. The decision depends on considerations like maximum power to be transmitted, space availability for the installation, weight, cost or availability of waveguide components on the market. Whereas the maximum power demand might require larger size, space demands force to smaller dimensions.

The type of distribution system depends on similar considerations. In addition demands like required isolation between cavities (cross talk), RF parameters to be controlled or adjusted and more requirements must be considered. It is therefore worthwhile to take into account all possible requirements as early as possible and to trade them off.

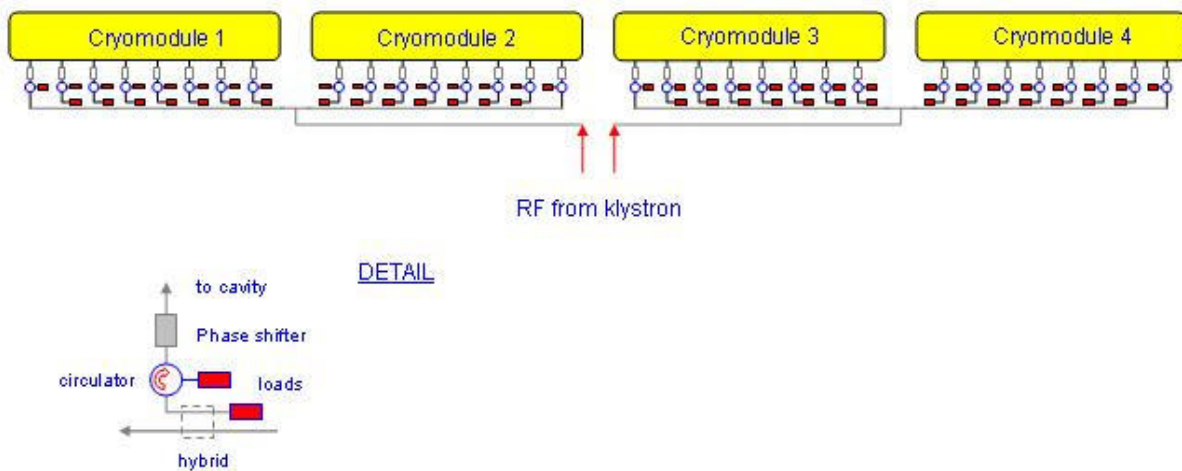


**Fig. 1:** Principle of an RF power transport system proposed for the TESLA linear collider

Figure 1 shows the principle of a waveguide distribution system which has been proposed for the TESLA linear collider. The RF power is generated by a 10MW high power klystron and extracted by two output windows towards four accelerator modules with eight superconducting cavities each. In order to achieve a gradient of 23.4MV/m an input power of 231kW per cavity is required. The total power produced by the RF power source must take into account losses in the waveguides and a regulation reserve. The power of each klystron waveguide arm is split again by a 3db-hybrid. For each module a linear distribution system similar as in figure 2 is used. Equal amounts of power are branched off for the individual cavities by hybrids with different coupling ratio. Isolators (three port circulators with loads) capable of 400kW protect the power source from reflected power travelling back from the cavities during the filling time of the cavities or in case of mismatch or breakdown in the cavities. Three stub tuners or phase shifters can be used for adjustment of phase and  $Q_{ext}$ .

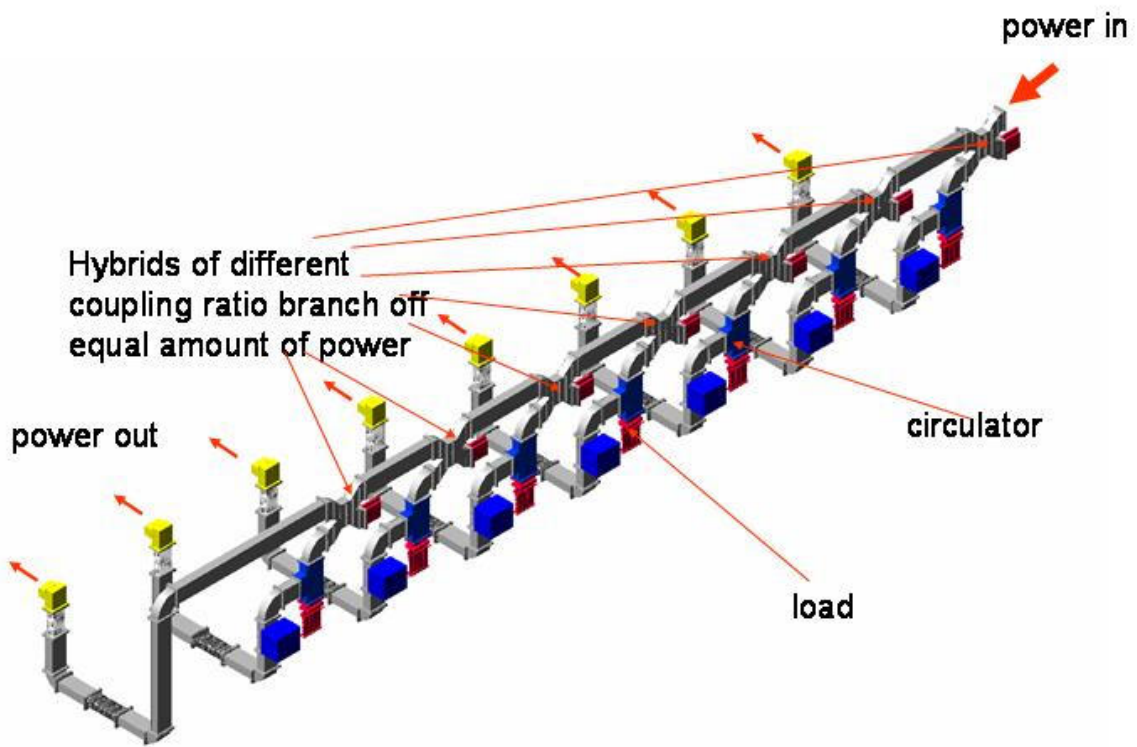

**Fig. 2:** Linear waveguide distribution system

Instead of a linear distribution system a tree like system can be used (figure 3). The power is divided by shunt tees into several branches like branches of a tree.

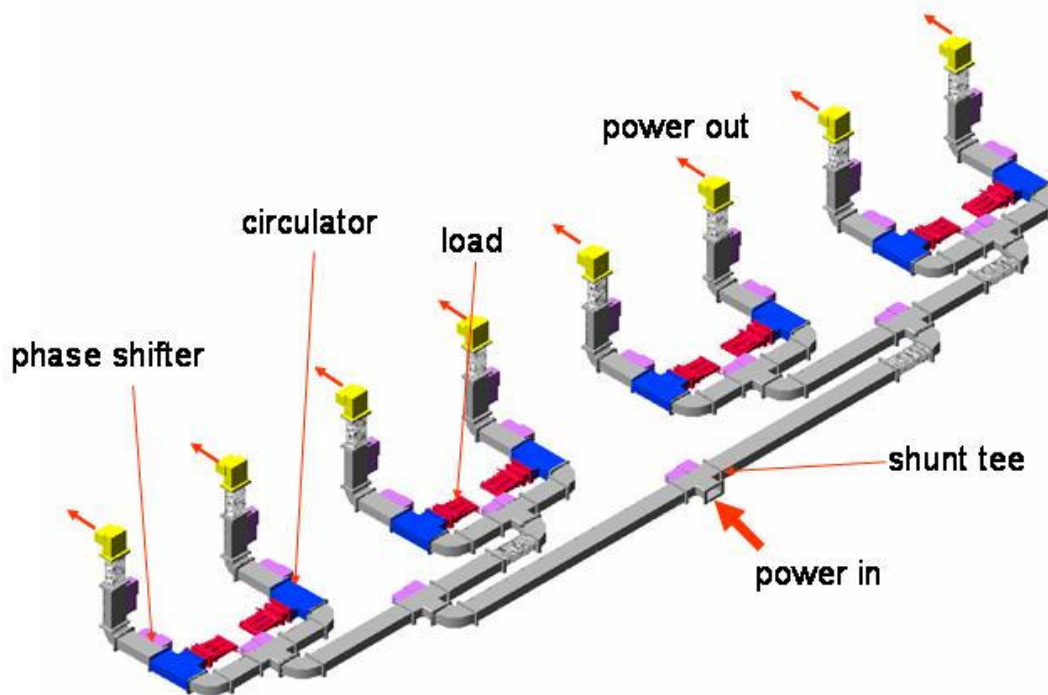

**Fig. 3:** Tree-like waveguide distribution system

In figure 4 examples of distributions meeting the requirements of power distributions for the FLASH facility at DESY are shown. The input power for the distribution can be up to 2.5MW. Both distributions can be used to meet the requirements but because of certain advantages the first one will be used in the future for the European XFEL. The latter and older system is a linear system and is used for the first accelerator modules at FLASH at DESY. The combined system proposed for the European XFEL and in use for the new RF distributions at FLASH makes use of asymmetric shunt tees of different coupling ratios. Equal amounts of power are branched off to a pair of cavities. By adjustment of tuning posts inside the tees the coupling ratios can be adjusted thus changing the branching ratio. The phase between a pair of cavities is pre-tuned by fixed phase shifters (straight waveguides with different waveguide width). The phase for the individual cavities can be adjusted by movable mechanical phase shifters after the symmetric shunt tee which splits the power for two cavities. Isolators in front of each cavity protect the power source from reflected power. This system has several advantages. Space and weight are reduced compared with the linear system. Phasing is much easier than in the purely linear system. Because of the use of components of similar type the cost can be decreased. This system can also be pre-assembled and connected to an accelerator module before the module is installed in the accelerator tunnel, thus simplifying the entire installation procedure. An accelerator module with RF waveguide distribution can be seen in figure 5.

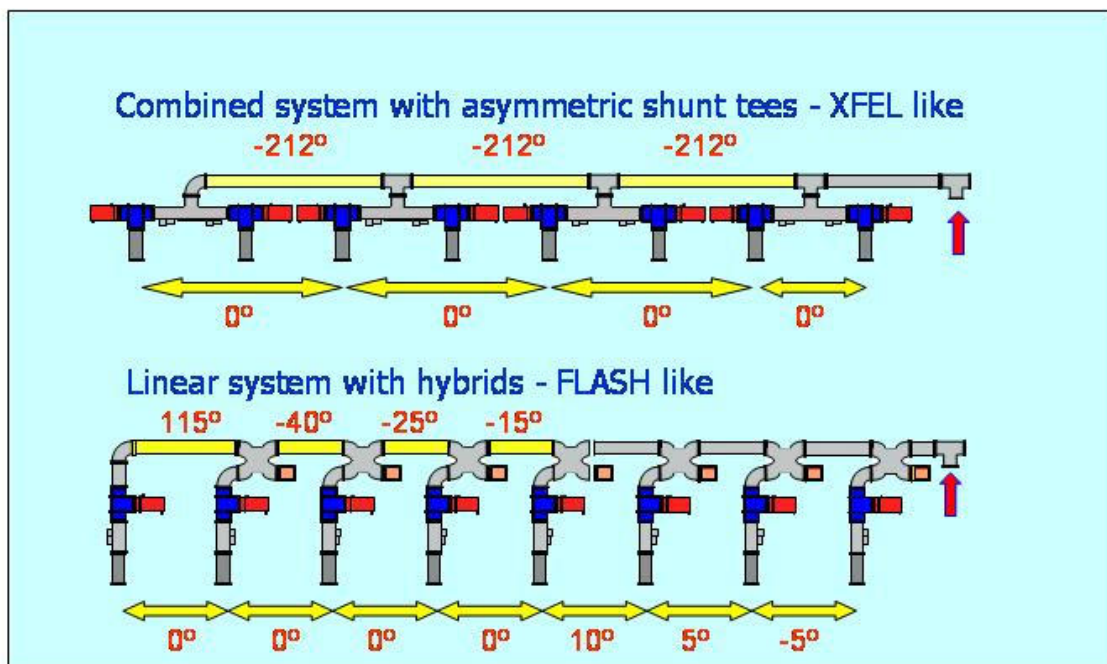


Fig. 4: Combined and linear RF waveguide distribution system



**Fig. 5:** Accelerator module and RF waveguide distribution

More information on the waveguide distribution systems for TESLA, FLASH and the European XFEL can be found in [8-12].

#### 4 Limitations, problems and countermeasures

In this section some limitations, problems and possible countermeasures in RF power transportation systems are covered.

The power  $P_{RF}$ , which can be transmitted in a rectangular waveguide of size  $a$  times  $b$  in  $TE_{10}$  mode of wavelength  $\lambda$  is given by :


$$P_{RF} = 6.63 \times 10^{-4} a[cm] b[cm] \left[ \frac{\lambda}{\lambda_g} \right] E[V/cm]^2$$

with 
$$\lambda_g = \frac{\lambda}{\sqrt{1 - \left(\frac{\lambda}{2a}\right)^2}},$$

where  $E$  in  $V/cm$  is the electrical field strength of the electromagnetic wave and  $\lambda_g$  the guide wavelength. The maximum power is the power at the electrical breakdown limit  $E_{max}$ . In air  $E_{max}$  is 30kV/cm, which results in an RF power of 58MW at 1.3GHz in a WR650 waveguide. Experience shows that this power can not be achieved. In practice it is 5-10 times lower. The practical power limit is lower, because of a variety of different reasons: e.g. smaller size of the inner waveguide dimensions (e.g. within circulators), surface effects (roughness, steps at flanges (see figure 6) etc.), dust in waveguides, humidity of the gas inside the waveguide, reflections (VSWR) or because of higher order modes in  $TE_{nm}/TM_{nm}$ .

These HOMs can be generated by the power source or by nonlinear effects at high power in non-reciprocal devices like circulators. If these modes are not damped, they can be excited resonantly

and reach very high field strength above the breakdown limit. In order to damp HOMs higher order mode dampers can be installed. These can be complicated and specially designed devices, which couple out and damp the HOMs only, leaving the fundamental mode, which is transmitted in  $TE_{10}$ , untouched. But sometimes a quick solution must be found. This can be accomplished by inserting small antennas at the small side of the waveguides (see figure 7). These antennas couple to a number of HOMs in  $TE_{nm}/TM_{nm}$ . Since the field of  $TE_{10}$  is already small at the antenna position only a small amount of the power in the fundamental mode is coupled out. The antennas must be connected to loads, which must be able to handle the full amount of the power coupled out.

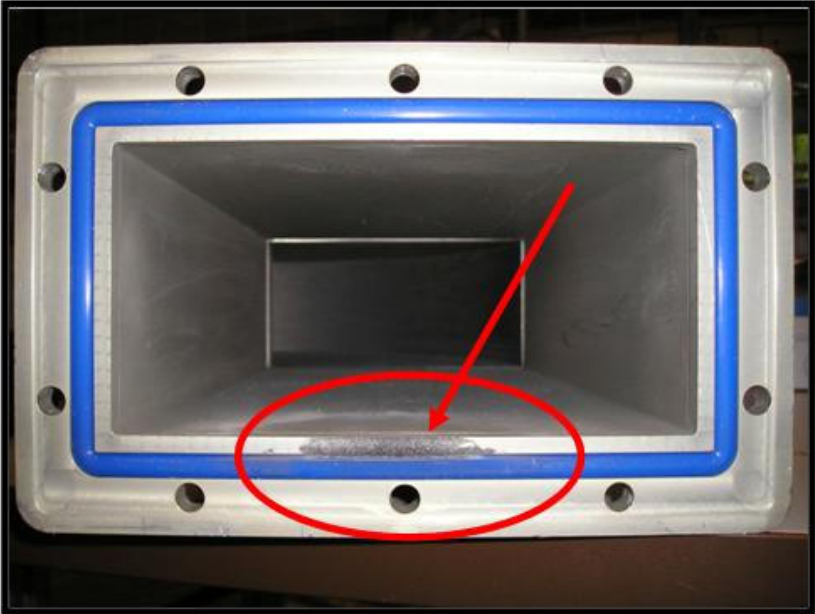

**Fig. 6:** Waveguide which has been damaged at the flange by breakdown



**Fig. 7:** Waveguide with damping antennas at the small side of the waveguide

One could increase the gas pressure inside the waveguide, which due to Paschens law would increase the power capability. But this requires enforced and gas tight waveguides. In addition the pressure vessel rules applicable in many countries must be followed. By using  $SF_6$  instead of air,

which has  $E_{\max}=89\text{kV/cm}$  (at 1bar,  $20^{\circ}\text{C}$ ), the power capability can be increased, too. The problem of  $\text{SF}_6$  is that although it is chemically very stable it is a green house gas and if cracked in sparks can together with the hydrogen of the rest amount of water form  $\text{HF}$ , which is a very aggressive acid.  $\text{HF}$  can produce fluorides of the metal of the waveguide walls which one can sometimes find as white powder in the waveguides (see figure 8). Other chemical poisonous chemicals e.g.  $\text{S}_2\text{F}_{10}$  are being produced too. Personnel maintaining waveguide components which have been operated in  $\text{SF}_6$  has to observe a number of safety rules and has to wear personal protection equipment (see figure 9).



**Fig. 8:** Fluorides in a waveguide



**Fig. 9:** Staff wearing protection clothes during work at  $\text{SF}_6$  waveguides

## 5 Acknowledgements

The author would like to thank two persons who among others supported him during preparation of this lecture. Valery Katalev provided simulation results and pictures of waveguide distributions. Ingo Sandvoss took many photographs.

## 6 References

- [1] R. E. Collin, Foundations for Microwave Engineering, McGraw Hill 1992
- [2] D. M. Pozar, Microwave Engineering, Wiley 2004
- [3] N. Marcuvitz, Waveguide Handbook, MIT Radiation Laboratory Series, Vol. 10, McGraw Hill 1951
- [4] H. J. Reich, P. F. Ordnung, H. L. Krauss, J. G. Skalnik, Microwave Theory and Techniques, D. van Nostrand 1953
- [5] R. K. Cooper, R. G. Carter, High Power RF Transmission, in Proceedings of the CERN Accelerator School: Radio Frequency Engineering, 8-16 May 2000, Seeheim, Germany
- [6] R. K. Cooper, High Power RF Transmission, in Proceedings of the CERN Accelerator School: RF Engineering for Particle Accelerators, 3-10 April 1991, Oxford, UK
- [7] A. Nassiri, Microwave Physics and Techniques, USPAS, Santa Barbara, Summer 2003
- [8] V. Katalev, S. Choroba, "RF Power Distributing Waveguide System for TESLA", Proceedings of the Russian Particle Accelerator Conference, Rupac 2002, Obninsk, Russia, October 1-4, 2002, p 79.
- [9] V. Katalev, S. Choroba, "Tuning of External Q and Phase for the Cavities of a Superconducting Linear Accelerator", Proceedings of the XXII International Linear Accelerator Conference, Linac 2004, Lübeck, Germany, August 16-20, 2004, p 724.
- [10] V. Katalev, S. Choroba, "Compact Waveguide Distribution with Asymmetric Shunt Tees for the European XFEL", Proceedings of the 22nd Particle Accelerator Conference, PAC07, Albuquerque, USA, June 25-29, 2007, p. 176.
- [11] S. Choroba et al., "Operation experience with the FLASH RF waveguide distribution system at DESY", Proceedings of the XXIV Linear Accelerator Conference, LINAC08, Victoria, BC, Canada, September 29 - October 3, 2008, p. 978
- [12] V. Katalev, S. Choroba, "Waveguide Distribution for FLASH", Sixth CW and High Average Power RF Workshop, CWRF2010, Barcelona, SPAIN, May 4-7, 2010, <http://cwrf2010.cells.es/>