

# Intrinsic Stabilization of the Drive Beam in Plasma-Wakefield Accelerators

A. Martinez de la Ossa,<sup>1,2,\*</sup> T. J. Mehrling,<sup>1,3,†</sup> and J. Osterhoff<sup>1</sup>

<sup>1</sup>*Deutsches Elektronen-Synchrotron DESY, 22607 Hamburg, Germany*

<sup>2</sup>*Institut für Experimentalphysik, Universität Hamburg, 22761 Hamburg, Germany*

<sup>3</sup>*Lawrence Berkeley National Laboratory, Berkeley, California 94720, USA*



(Received 5 March 2018; published 8 August 2018)

The hose instability of the drive beam constitutes a major challenge for the stable operation of plasma-wakefield accelerators. In this Letter, we show that drive beams with a transverse size comparable to the plasma blowout radius generate a wake with a varying focusing along the beam, which leads to a rapid detuning of the slice-betatron oscillations and suppresses the instability. This intrinsic stabilization principle provides an applicable and effective method for the suppression of the hosing of the drive beam and allows for a stable acceleration process.

DOI: [10.1103/PhysRevLett.121.064803](https://doi.org/10.1103/PhysRevLett.121.064803)

In plasma-wakefield accelerators (PWFAs), highly relativistic particle beams are used to excite plasma wakes which carry extreme accelerating fields [1]. The accelerating gradients surpass those produced in today's conventional particle accelerators by orders of magnitude and therefore, PWFAs constitute an attractive solution for the miniaturization of the future particle acceleration technology and its derived applications.

Operating PWFAs in the blowout regime [2] enables injection methods for the production of high-quality witness beams [3–8] and the efficient acceleration within the plasma wake [9,10]. However, due to the extreme focusing fields in the blowout plasma cavity, the drive and witness beams in PWFAs are subject to transverse instabilities with large growth rates. In particular, the hose instability (HI) of the drive beam constitutes a major challenge for the optimal operation of PWFAs [11]. The HI is initiated by a transverse deviation of the centroid of the drive beam which causes a displacement of the center of the focusing ion channel, which in turn feeds back into the trailing part of the beam, leading to the resonant buildup of the transverse centroid oscillations. It was recently shown that the inherent drive beam energy loss detunes the betatron oscillations of beam electrons and thereby mitigates the HI [12]. Still, for drive beams with a substantial hosing seed, beam breakup can occur before this mitigation mechanism becomes effective.

In this Letter, we show by means of analytical theory and particle-in-cell (PIC) simulations with HiPACE [13], that drive beams with a transverse size comparable to the plasma blowout radius generate a wake with a varying focusing along the drive beam, which causes a rapid detuning of the centroid oscillations and suppresses the HI. Still, the plasma blowout is completely formed in regions behind the drive beam, and therefore, the witness beams can be efficiently accelerated with no emittance

degradation. The damping effect caused by head-to-tail variations of the betatron frequency is well known in radio frequency accelerators [14–16], and it has been recently shown to apply in the linear regime of plasma-wakefield acceleration [17,18] for the mitigation of the HI. In this Letter, we show for the first time that this stabilization principle is compatible with the blowout regime for sufficiently wide, high-current and moderate-length drive beams. The blowout regime is the most common regime in PWFAs, and therefore, this work is of crucial interest for understanding why the hosing of the drive beam was avoided in Facility for Advanced Accelerator Experimental Tests [19] and how it can be further suppressed in future PWFA experiments [20–22].

We start by considering a relativistic electron beam entering an initially neutral and homogeneous plasma. As the beam propagates through the plasma, it expels plasma electrons by means of its space-charge fields, generating in this way a plasma wakefield which propagates at the velocity of the beam. The generated wakefields exert a force  $\dot{\mathbf{p}} = -e\mathbf{W}$  on the beam electrons, where  $\mathbf{p}$  is the momentum of a beam electron,  $e$  the elementary charge,  $\mathbf{W} = (E_x - cB_y, E_y + cB_x, E_z)$  the wakefield, and  $c$  the speed of light. Expressions for the wakefield  $\mathbf{W}$  have been derived in the linear [23,24] and the blowout regime of PWFAs [25,26], for axisymmetric drivers and assuming a quasistatic plasma response. The quasistatic approximation assumes that the fields and currents of the beam are frozen, or quasistatic, during the plasma evolution in the comoving frame, i.e.,  $\partial_t \simeq -c\partial_\zeta$  for these quantities, with  $\zeta = z - ct$ , denoting the comoving variable. Under this approximation, it is found from Maxwell equations that the wakefields satisfy the following relations,  $\partial_x W_z = \partial_\zeta W_x \simeq -(m\omega_p^2/e)(j_{p,x}/n_0c)$ , and  $\partial_x W_x \simeq (m\omega_p^2/2e)(1 - n_p/n_0 + j_{p,z}/n_0c)$ , with  $\omega_p = \sqrt{n_0 e^2/m\epsilon_0}$  the plasma frequency,  $n_0$  and  $n_p$  the unperturbed and

perturbed plasma electron density, respectively, and  $j_{p,z}$  ( $j_{p,x}$ ) the longitudinal (transverse) plasma electron current. Ions are assumed to be immobile and the transverse beam current to be negligible. Beams with an electron density  $n_b$  higher than  $n_0$  expel essentially all plasma electrons near the propagation axis, forming a homogeneous ion cavity delimited by a sheath of plasma electrons. The maximum distance of this sheath with respect to the beam propagation axis is commonly referred to as the blowout radius,  $r_{b0}$ . Inside this ion cavity (or blowout) we have that  $\partial_x W_z = \partial_\zeta W_x = 0$  and  $\partial_x W_x = m\omega_p^2/2e$ , and the equation of motion for the beam electrons can be written as

$$\ddot{x} + \frac{\mathcal{E}}{\gamma} \dot{x} + \frac{\mathcal{K}}{\gamma} x = 0, \quad (1)$$

where both the focusing strength,  $\mathcal{K} \equiv (e/m)\partial_x W_x$ , and the rate of energy change,  $\mathcal{E} \equiv \dot{\gamma} = -(e/mc)W_z$ , are constant for beam electrons at a fixed  $\zeta$  position, and  $\gamma \simeq p_z/mc$ . When  $n_b < n_0$  the blowout is not complete and the charge of the ions is partially screened by the plasma electron density, i.e.,  $\mathcal{K} \approx \omega_p^2[1 - (n_p/n_0)]/2$ , for a nonrelativistic plasma response in the region of the beam. Assuming  $n_p$  constant with the radius for regions sufficiently close to the propagation axis, Eq. (1) is still applicable to the beam electrons within a partial blowout, where now  $\mathcal{K}$  obtains a  $\zeta$  dependency through  $n_p(\zeta)$ . Equation (1) describes the transverse betatron oscillations of the beam electrons, with a frequency  $\omega_\beta(t) = \sqrt{\mathcal{K}/\gamma(t)}$ . Given that  $\omega_\beta$  is a slowly varying function [27], i.e.,  $\dot{\omega}_\beta/\omega_\beta^2 = \mathcal{E}/2\sqrt{\mathcal{K}\gamma} \ll 1$ , analytical solutions to Eq. (1) can be given in the following form:

$$x(t) = x_0 A \cos \phi + \frac{\dot{x}_0}{\omega_{\beta,0}} A \sin \phi, \quad (2)$$

with  $\dot{x}_0 = p_{x,0}/m\gamma_0$ , the initial transverse velocity of the electron,  $\omega_{\beta,0} = \sqrt{\mathcal{K}/\gamma_0}$ , the initial betatron frequency,  $A(t) = [\gamma_0/\gamma(t)]^{1/4}$ , the amplitude modulation, and  $\phi(t) = \int_0^t \omega_\beta(t') dt'$ , the phase advance. When  $\mathcal{K}(\zeta)$  and  $\mathcal{E}(\zeta)$  do not change with time, the phase advance can be written explicitly as

$$\phi(t) = 2 \frac{\sqrt{\mathcal{K}}}{\mathcal{E}} (\sqrt{\gamma} - \sqrt{\gamma_0}), \quad (3)$$

which for  $\mathcal{E} \rightarrow 0$  yields  $\phi \simeq \omega_{\beta,0} t$ . We now consider an infinitesimal  $\zeta$  slice of the drive beam, with an initial phase-space distribution  $f_0(x_0, p_{x,0}, \gamma_0) = f_x(x_0, p_{x,0})\delta(\gamma_0)$ . Since  $\gamma(t) = \gamma_0 + \mathcal{E}t$  for all electrons within the  $\zeta$  slice, it is straightforward to find an equation for the transverse centroid  $X_b(t) \equiv \int x(t) f_x dx_0 dp_{x,0}$ , by taking corresponding averages of Eq. (2). The resulting equation for  $X_b$  has the same functional dependence as Eq. (2), and therefore, the beam centroids also describe

betatron oscillations with frequency  $\omega_\beta(t)$  and amplitude  $\mathcal{A}(t) = A(t) \sqrt{X_{b,0}^2 + (\dot{X}_{b,0}/\omega_{\beta,0})^2}$ , where  $X_{b,0}$  and  $\dot{X}_{b,0} \equiv \int \dot{x}_0 f_x dx_0 dp_{x,0}$  denote the initial transverse displacement and velocity of the centroid, respectively.

When the drive beam has a small offset in the  $x$  direction,  $X_b$ , the resulting wakefields develop an asymmetry in the transverse direction. At first order perturbation, the modified wakefields  $W'_x(x)$  can be considered identical to the axisymmetric case, but with a certain offset,  $X_c$ , with respect to the propagation axis, i.e.,  $W'_x(x) = W_x(x - X_c)$ . In the blowout regime of PWFA a differential equation for  $X_c$  was derived in [11], for a sufficiently narrow drive beam, completely embedded in the ion cavity:

$$\partial_\zeta^2 X_c + k_c^2 (X_c - X_b) = 0, \quad (4)$$

where  $k_c = k_p \sqrt{c_\psi(\zeta)c_r(\zeta)/2}$ , and  $k_p = \omega_p/c$ . The coefficients  $c_\psi(\zeta)$  and  $c_r(\zeta)$  account for the relativistic motion of electrons in the blowout sheath and for a  $\zeta$  dependence of the blowout radius and the beam current [11]. Equation (4) describes the oscillations of  $X_c$  driven by the beam centroid displacements  $X_b$ . In turn, the displacement  $X_c$  couples back to  $X_b$  according to

$$\ddot{X}_b + \frac{\mathcal{E}}{\gamma} \dot{X}_b + \frac{\mathcal{K}}{\gamma} (X_b - X_c) = 0. \quad (5)$$

This set of coupled equations (4) and (5) has been studied earlier in the ion-channel regime (with  $k_c = k_p/\sqrt{2}$  and  $\mathcal{E} = 0$ ) [28,29], and for the blowout regime of PWFA [11], assuming perfectly monoenergetic beams with no energy change ( $\mathcal{E} = 0$ ) and a constant focusing ( $\mathcal{K} = \omega_p^2/2$ ). These cases are characterized by an exponential growth of  $X_b$  and  $X_c$  in time and towards the tail of the beam. The HI of the drive beam is initiated by a finite centroid displacement of the drive beam  $X_{b,0}$ , which is amplified due to a coherent coupling of different  $\zeta$  slices of the beam through the plasma. The effect of a  $\zeta$ -dependent energy change in the drive beam,  $\mathcal{E}(\zeta)$ , has been recently studied in Ref. [12]; it was shown that hosing saturates as soon as the centroid oscillations of various  $\zeta$  slices become detuned owing to a differing rate of energy change and/or an initial energy spread.

In this Letter, we extend the study of the HI of the drive beam in PWFAs, from earlier considerations with narrow beams, to cases where the initial transverse dimensions of the drive beams are comparable to the blowout radius. For this analysis we combine PIC simulation results with theoretical considerations, so as to demonstrate that by controlling the width of the drive beam at the entrance of the plasma, it is possible to generate a longitudinally varying focusing strength along the drive beam only, which rapidly detunes the centroid oscillations of different beam

slices, thereby suppressing the HI on a short time scale, on the order of the betatron oscillation period.

For the PIC simulations, we consider perfectly monoenergetic, highly relativistic drive beams with an initially tilted Gaussian electron distribution, which provides a well-defined seed to the HI:  $n_b = n_{b,0} \exp[-\zeta^2/2\sigma_z^2] \times \exp\{-[x - X_{b,0}(\zeta)]^2 - y^2\}/2\sigma_{x,0}^2\}$ . The beams propagate through a homogeneous plasma with a density such that  $k_p\sigma_z = 1$ . At this density, the plasma blowout radius is approximately given by [26]  $k_p r_{bo} \approx 2\sqrt{\Lambda_{b,0}}$ , with  $\Lambda_{b,0} \equiv 2I_{b,0}/I_A$ ,  $I_A = 17.05$  kA the Alfvén current, and  $I_{b,0}$  the peak current of the beam. In all the simulations  $I_{b,0} = 2.5$  kA, for which  $k_p r_{bo} \approx 1.1$ . The transverse (rms) size  $\sigma_{x,0}$  is varied from 0.1 to  $0.9k_p^{-1}$ , and accordingly  $n_{b,0}/n_0 = \Lambda_{b,0}/(k_p\sigma_{x,0})^2$  goes from 29 to 0.36. For the narrow cases ( $\sigma_{x,0} \ll r_{bo}$ ) the beam is initially overdense ( $n_{b,0} \gg n_0$ ), while for the wide cases ( $\sigma_{x,0} \sim r_{bo}$ ) it is underdense ( $n_{b,0} \lesssim n_0$ ). When  $\sigma_{x,0} \approx r_{bo}$  then  $n_{b,0}/n_0 \approx 1/4$ . See the Supplemental Material [30] for additional simulation parameters.

Figure 1 shows the central  $\zeta - x$  plane in the beginning of the propagation in the plasma, for two exemplary simulation runs: Case  $C_a$  with  $k_p\sigma_{x,0} = 0.1$  and case  $C_b$  with  $k_p\sigma_{x,0} = 0.5$ . In case  $C_a$ ,  $\sigma_{x,0} \ll r_{bo}$  and most of the slices of the drive beam are completely embedded in the blowout cavity [Fig. 1(a), top]. In case  $C_b$ , the beam is wider and initially underdense, and therefore, the blowout formation is only partial in the region of the beam [Fig. 1(b), top]. The energy change along the beam  $\mathcal{E}(\zeta)$  is similar for both cases (Fig. 1, middle). The focusing strength  $\mathcal{K}(\zeta)$  along the beam is perfectly uniform for the narrow beam case  $C_a$ , but it substantially varies for the wide beam case  $C_b$  (Fig. 1, bottom), where a finite plasma

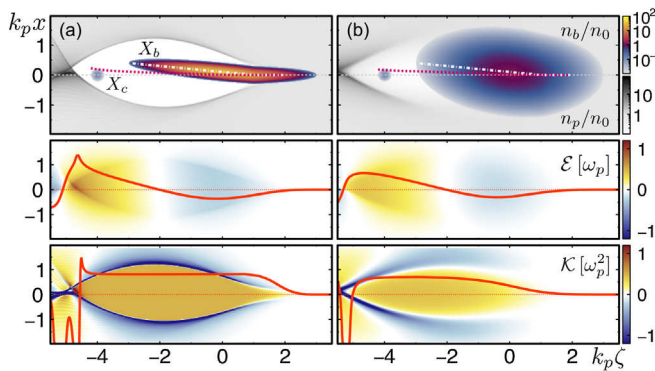


FIG. 1. PIC simulations for a narrow beam with  $k_p\sigma_{x,0} = 0.1$  (a) and a wide beam with  $k_p\sigma_{x,0} = 0.5$  (b), immediately after entering the homogeneous plasma. Top: plasma electron density  $n_p$  and beam electron density  $n_b$ . Middle: rate of energy change,  $\mathcal{E} \equiv -(e/mc)E_z$ . Bottom: focusing strength,  $\mathcal{K} \equiv (e/m)\partial_x W_x$ . Red curves represent the corresponding lineouts on the propagation axis. The centroids of the beam  $X_b(\zeta)$  and the focusing channel  $X_c(\zeta)$  are shown in white and purple lines, respectively.

electron density in the region of the beam alters the focusing field associated with the ion channel.

The beam and plasma electron densities at  $\omega_p t = 2045$  for the cases  $C_a$  and  $C_b$  are shown in Figs. 2(a) and 2(b), respectively. After some propagation, the wide drive beam ( $C_b$ ) is transversely compressed by the self-generated focusing field, enhancing in this way the plasma blowout formation [Fig. 2(b)]. The average centroid position  $\bar{X}_b$  within a central region of the drive beam with length  $k_p\Delta_\zeta = 1$ , is shown as a function of the propagation time in Fig. 2(c), for five different initial values of the transverse size (rms). It is apparent that the average centroid oscillations are rapidly suppressed for the cases with a wide beam. As we explain below, this effect is primarily associated with a quick decoherence between the oscillations of the slices within the central beam region due to a nonuniform focusing strength along the drive beam.

We further investigate the stability of the PWFA in the PIC simulations by studying the evolution of a low-current witness beam, initially placed on the propagation axis at comoving position  $k_p\zeta = -4$ . The simulations with a narrow drive beam are affected by the HI and the witness beam breaks up after a short propagation distance. Only for the wide drive beam cases with  $k_p\sigma_{x,0} = 0.7$  and  $0.9$ , where the HI is rapidly suppressed, the witness beams are efficiently accelerated with no slice emittance degradation. Remarkably, the acceleration performance is barely affected, dropping only by 10% and 15%, respectively, when compared to a symmetric narrow drive beam case without hosing. Extended information about the PIC simulation results can be found in the Supplemental Material [30].

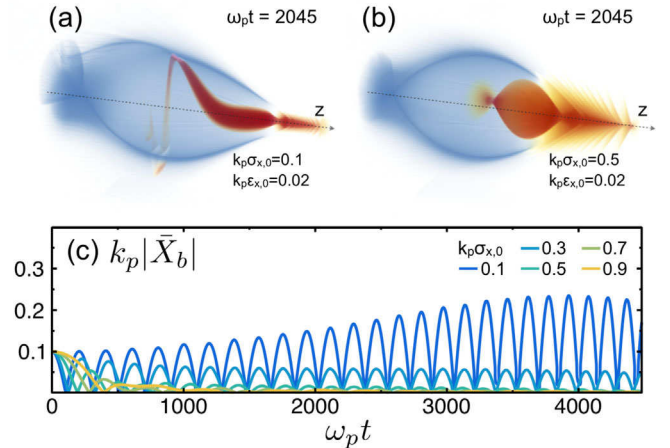


FIG. 2. PIC simulation results for (a) a narrow beam with  $k_p\sigma_{x,0} = 0.1$  and (b) a wide beam with  $k_p\sigma_{x,0} = 0.5$  (b), after some propagation in the plasma. (c) Average centroid oscillations within the central region  $k_p\Delta_\zeta = 1$  of the drive beam as a function of the propagation time, for five cases with different initial transverse size.



The decoherence rates owing to longitudinal variations of the betatron frequency can be estimated by considering an infinitesimal  $\zeta$  slice with constant  $\mathcal{K}$  and  $\mathcal{E}$ , together with the solutions of Eq. (5). Taking partial derivatives of Eq. (3), we obtain the differential phase advance along the beam

$$\partial_\zeta \phi \simeq \frac{\omega_{\beta,0} t}{2} \left( \frac{\partial_\zeta \mathcal{K}}{\mathcal{K}} - \frac{\partial_\zeta \gamma_0}{\gamma_0} \right) - \frac{(\omega_{\beta,0} t)^2}{4} \frac{\partial_\zeta \mathcal{E}}{\omega_{\beta,0} \gamma_0}, \quad (6)$$

where we have included the contribution from a  $\zeta$ -dependent initial energy variation in the beam. Equation (6) is valid up to leading order in  $t/t_{\text{dp}}$ , with  $t_{\text{dp}} \equiv \gamma_0/|\mathcal{E}|$  the energy depletion time. For an early time,  $t \ll t_{\text{dp}}$ , the phase advance difference between different  $\zeta$  slices is dominated by either the relative variation of the focusing strength along the beam,  $\kappa \equiv \partial_\zeta \mathcal{K}/\mathcal{K}$ , and/or an initial relative energy chirp, which is identically 0 in the hereby considered cases. The differential phase advance caused by the variation of  $\mathcal{E}$  only appears at second order in  $t/t_{\text{dp}}$ .

We now consider a beam region with length  $\Delta_\zeta$ , an uniform current and with a linear variation of  $\mathcal{K}$  and  $\mathcal{E}$ . The decoherence time for this beam region can be defined by the time at which the head-to-tail difference of the phase advance is on the order of  $\pi$ , which corresponds to opposite oscillation states. Thus, we use Eq. (6) to estimate the decoherence time when either only  $\partial_\zeta \mathcal{K} \neq 0$ , i.e.,  $\omega_{\beta,0} t_{d,\kappa} = 2\pi/\kappa \Delta_\zeta$ , or when only  $\partial_\zeta \mathcal{E} \neq 0$ , i.e.,  $\omega_{\beta,0} t_{d,\varepsilon} = 2\sqrt{\pi/\varepsilon \Delta_\zeta}$  with  $\varepsilon \equiv \partial_\zeta \mathcal{E}/\omega_{\beta,0} \gamma_0$ . The centroid oscillations of various  $\zeta$  slices along the beam region  $\Delta_\zeta$  are detuned after the respective decoherence times and the impact of the beam region onto the focusing channel deviation, which leads to hosing, is strongly suppressed. As a consequence, the oscillation amplitude of the individual  $\zeta$  slices is expected to saturate and the average centroid displacement within the beam region,  $\bar{X}_b = \Delta_\zeta^{-1} \int_{\Delta_\zeta} X_b(\zeta) d\zeta$ , to be strongly damped after the decoherence time.

This model is used to evaluate the decoherence of the centroid oscillations within a central beam region with length  $k_p \Delta_\zeta = 1$  through the quantity  $\bar{X}_b$ , for two exemplary cases  $C'_a$  and  $C'_b$ , that resemble the PIC simulation cases  $C_a$ , for a narrow beam with  $k_p \sigma_{x,0} = 0.1$ , and  $C_b$ , for a wide beam with  $k_p \sigma_{x,0} = 0.5$ , respectively. For simplicity, we assume a fixed channel centroid  $X_c = 0$ , and  $k_p X_{b,0} = 0.1$ ,  $\dot{X}_{b,0} = 0$  for all the  $\zeta$  slices in the cases  $C'_a$  and  $C'_b$ . In Fig. 1 we show the values of  $\mathcal{E}(\zeta)$  and  $\mathcal{K}(\zeta)$  for the PIC simulation cases  $C_a$  and  $C_b$  in the beginning of the propagation in plasma. We adopt the central values and derivatives of these quantities in the analytical calculation of the model cases  $C'_a$  and  $C'_b$ . In addition, we perform a numerical integration of the exact equation of motion  $\dot{\mathbf{p}} = -e\mathbf{W}$ , for a set of  $10^6$  particles representing the considered beam region. This numerical approach allows

us to account for nonlinear effects in the motion of the beam electrons with a higher oscillation amplitude [31], which are not included in the purely analytical calculation. The nonuniformity of  $\mathcal{K}$  and  $\mathcal{E}$  for  $|x| \gtrsim r_{b0}$  is also accounted for by adopting the values from the PIC simulations (cf. Fig. 1).

In Fig. 3 we show the centroid oscillations for 50  $\zeta$  slices along the considered beam region  $\Delta_\zeta$  (colored curves), together with their average  $\bar{X}_b$  obtained from the numerical approach (black line) and as a result of the analytical model (red dashed line). For case  $C'_a$  [Fig. 3(a)],  $\kappa \simeq 0$  within the considered beam region and the decoherence occurs predominantly from a differential energy change along the beam. In this case, the decoherence time is approximately  $t_{d,\varepsilon} \simeq 8000/\omega_p$ , which is comparable to the energy depletion time  $t_{\text{dp}} \simeq 9000/\omega_p$ . The analytical model is in excellent agreement with the numerical calculation for this narrow beam scenario. For case  $C'_b$  [Fig. 3(b)],  $\kappa \neq 0$  and the decoherence from a variation of the focusing strength along the beam region dominates. Hence, the decoherence time can be estimated by  $t_{d,\kappa} \simeq 800/\omega_p$ , which is on the order of the initial betatron period of the beam electrons  $T_{\beta,0} = 2\pi/\omega_{\beta,0} \simeq 590/\omega_p$ . In this case, the model predicts that decoherence is reached on a much shorter time scale than for the narrow beam case  $C'_a$ , in good qualitative agreement with the behavior observed in the PIC simulation cases  $C_a$  and  $C_b$ .

We note that for the wide beam case  $C'_b$ , the nonlinear effects on the motion of the electrons with a higher oscillation amplitude cause additional decoherence through

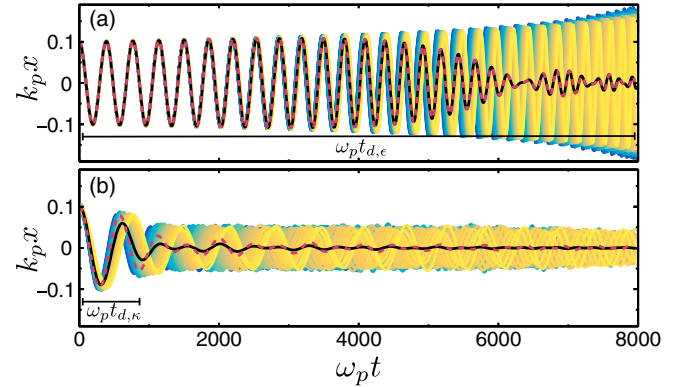


FIG. 3. Centroid displacements of 50 equally spaced  $\zeta$  slices within the beam region  $k_p \Delta_\zeta = 1$  for a narrow beam with  $k_p \sigma_{x,0} = 0.1$  (case  $C'_a$ ) (a) and a wide beam with  $k_p \sigma_{x,0} = 0.5$  (case  $C'_b$ ) (b). The centroids are calculated by numerical integration of the equations of motion for a set of  $10^6$  particles composing the beam region. Yellow curves refer to slices near the front and blue curves slices at the back of the beam region. The black curve shows the average centroid displacement of the beam region,  $\bar{X}_b$ . The red dashed curve represents the analytical calculation for  $\bar{X}_b$ , when just Eq. (5) with  $X_c = 0$  for the beam centroid displacements is considered.

intra-slice phase mixing [31], and consequently, a damping of the centroid oscillation amplitude of the different  $\zeta$  slices. As a result, the numerical calculation predicts a slightly higher damping of  $\bar{X}_b$  than the analytical model in case  $C'_b$  [Fig. 3(b)]. From the comparison between the analytical and the numerical approaches, we identify the decoherence caused by a finite  $\partial_\zeta \mathcal{K}$  as the main effect responsible for the fast suppression of the HI observed in PIC simulations with wide drive beams.

In conclusion, we show that the HI in PWFAs is rapidly suppressed for drive beams with an initial transverse size comparable to the blowout radius. The intrinsic variation of the focusing strength in the beam region for scenarios with initially wide and underdense drive beams leads to a quick decoherence between the centroid oscillations of various slices along the beam, and consequently, to the suppression of the instability. Still, behind the drive beam the blowout formation is complete and the witness beams are efficiently accelerated with no emittance degradation. This intrinsic stabilization principle provides an applicable and effective method for the suppression of the HI of the drive beam and will allow for a stable acceleration process in future PWFA experiments.

We acknowledge the grant of computing time by the Jülich Supercomputing Center on JUQUEEN under Project No. HHH23 and the use of the High-Performance Cluster (Maxwell) at DESY. T. J. M. acknowledges the support by the DAAD with funds from the BMBF and the MSCA of the EU's FP7 under REA Grant No. 605728 (P. R. I. M.E.) and the support by the Director, Office of Science, Office of High Energy Physics, of the U.S. Department of Energy under Contract No. DE-AC02-05CH11231. A. M. acknowledges V. Libov and J. Zemella for useful discussions in the context of start-to-end simulations for FLASHForward, and the Helmholtz Virtual Institute VH-VI-503, for financial support.

\*alberto.martinez.de.la.ossa@desy.de

†tjmehrling@lbl.gov

- [1] V. I. Veksler, in *Proceedings of the 1st International Conference on High-Energy Accelerators, HEACC 1956, Geneva, Switzerland, 1956* (CERN, Geneva, Switzerland, 1956), pp. 80–83, <http://cds.cern.ch/record/1241563>.
- [2] J. B. Rosenzweig, B. Breizman, T. C. Katsouleas, and J. J. Su, *Phys. Rev. A* **44**, R6189 (1991).
- [3] E. Oz, S. Deng, T. Katsouleas, P. Muggli, C. D. Barnes, I. Blumenfeld, F. J. Decker, P. Emma, M. J. Hogan, R. Ischebeck, R. H. Iverson, N. Kirby, P. Krejcik, C. O'Connell, R. H. Siemann, D. Walz, D. Auerbach, C. E. Clayton, C. Huang, D. K. Johnson *et al.*, *Phys. Rev. Lett.* **98**, 084801 (2007).
- [4] B. Hidding, G. Pretzler, J. B. Rosenzweig, T. Königstein, D. Schiller, and D. L. Bruhwiler, *Phys. Rev. Lett.* **108**, 035001 (2012).

- [5] A. Martinez de la Ossa, J. Grebenyuk, T. J. Mehrling, L. Schaper, and J. Osterhoff, *Phys. Rev. Lett.* **111**, 245003 (2013).
- [6] A. Martinez de la Ossa, T. J. Mehrling, L. Schaper, M. J. V. Streeter, and J. Osterhoff, *Phys. Plasmas* **22**, 093107 (2015).
- [7] G. Wittig, O. Karger, A. Knetsch, Y. Xi, A. Deng, J. B. Rosenzweig, D. L. Bruhwiler, J. Smith, G. G. Manahan, Z.-M. Sheng, D. A. Jaroszynski, and B. Hidding, *Phys. Rev. ST Accel. Beams* **18**, 081304 (2015).
- [8] A. Martinez de la Ossa, Z. Hu, M. J. V. Streeter, T. J. Mehrling, O. Kononenko, B. Sheeran, and J. Osterhoff, *Phys. Rev. Accel. Beams* **20**, 091301 (2017).
- [9] K. V. Lotov, *Phys. Plasmas* **12**, 053105 (2005).
- [10] M. Tzoufras, W. Lu, F. S. Tsung, C. Huang, W. B. Mori, T. Katsouleas, J. Vieira, R. A. Fonseca, and L. O. Silva, *Phys. Rev. Lett.* **101**, 145002 (2008).
- [11] C. Huang, W. Lu, M. Zhou, C. E. Clayton, C. Joshi, W. B. Mori, P. Muggli, S. Deng, E. Oz, T. Katsouleas, M. J. Hogan, I. Blumenfeld, F. J. Decker, R. Ischebeck, R. H. Iverson, N. A. Kirby, and D. Walz, *Phys. Rev. Lett.* **99**, 255001 (2007).
- [12] T. J. Mehrling, R. A. Fonseca, A. Martinez de la Ossa, and J. Vieira, *Phys. Rev. Lett.* **118**, 174801 (2017).
- [13] T. J. Mehrling, C. Benedetti, C. B. Schroeder, and J. Osterhoff, *Plasma Phys. Controlled Fusion* **56**, 084012 (2014).
- [14] V. E. Balakin, A. V. Novokhatsky, and V. P. Smirnov, *Conf. Proc.* **C830811**, 119 (1983), <http://inspirehep.net/record/198113>.
- [15] G. Stupakov, Report No. SLAC-AP 108 (1997), <http://inspirehep.net/record/447468>.
- [16] C. L. Bohn and K.-Y. Ng, *Phys. Rev. Lett.* **85**, 984 (2000).
- [17] J. Vieira, W. B. Mori, and P. Muggli, *Phys. Rev. Lett.* **112**, 205001 (2014).
- [18] R. Lehe, C. B. Schroeder, J.-L. Vay, E. Esarey, and W. P. Leemans, *Phys. Rev. Lett.* **119**, 244801 (2017).
- [19] M. J. Hogan, T. O. Raubenheimer, A. Seryi, P. Muggli, T. Katsouleas, C. Huang, W. Lu, W. An, K. A. Marsh, W. B. Mori, C. E. Clayton, and C. Joshi, *New J. Phys.* **12**, 055030 (2010).
- [20] A. Aschikhin, C. Behrens, S. Bohlen, J. Dale, N. Delbos, L. di Lucchio, E. Elsen, J.-H. Erbe, M. Felber, B. Foster, L. Goldberg, J. Grebenyuk, J.-N. Gruse, B. Hidding, Z. Hu, S. Karstensen, A. Knetsch, O. Kononenko, V. Libov, K. Ludwig *et al.*, *Nucl. Instrum. Methods Phys. Res., Sect. A* **806**, 175 (2016).
- [21] V. Yakimenko, Y. Cai, C. Clarke, S. Green, C. Hast, M. J. Hogan, N. Lipkowitz, N. Phinney, G. White, and G. Yocky, in *Proceedings of the 7th International Particle Accelerator Conference, IPAC 2016, Busan, Korea, 2016* (JACoW, Geneva, Switzerland, 2016), <http://accelconf.web.cern.ch/AccelConf/ipac2016/doi/JACoW-IPAC2016-TUOBB02.html>.
- [22] T. Heinemann, R. W. Assmann, J. P. Couperus, B. Hidding, A. Knetsch, O. Kononenko, A. Köhler, T. Kurz, U. Schramm, O. Zarini, A. Irman, and A. Martinez de la Ossa, in *Proceedings of the 8th International Particle Accelerator Conference, IPAC 2017, Copenhagen, Denmark, 2017* (JACoW, Geneva, Switzerland, 2017), <http://accelconf.web.cern.ch/AccelConf/ipac2017/doi/JACoW-IPAC2017-TUPIK010.html>.

- [23] P. Chen, Part. Accel. **20**, 171 (1987), <http://inspirehep.net/record/227160>.
- [24] R. Keinigs and M. E. Jones, Phys. Fluids **30**, 252 (1987).
- [25] K. V. Lotov, Phys. Rev. E **69**, 046405 (2004).
- [26] W. Lu, C. Huang, M. Zhou, W. B. Mori, and T. Katsouleas, Phys. Rev. Lett. **96**, 165002 (2006).
- [27] I. Kostyukov, A. Pukhov, and S. Kiselev, Phys. Plasmas **11**, 5256 (2004).
- [28] D. H. Whittum, W. M. Sharp, S. S. Yu, M. Lampe, and G. Joyce, Phys. Rev. Lett. **67**, 991 (1991).
- [29] M. Lampe, G. Joyce, S. P. Slinker, and D. H. Whittum, Phys. Fluids B **5**, 1888 (1993).
- [30] See Supplemental Material at <http://link.aps.org/supplemental/10.1103/PhysRevLett.121.064803> for a description of numerical and physical parameters, and additional information about the PIC simulations results.
- [31] A. Ferran Pousa, R. W. Assmann, and A. Martinez de la Ossa, [arXiv:1804.10966v1](https://arxiv.org/abs/1804.10966v1) [Phys. Rev. Lett. (to be published)].