

# Quantum mechanical formulation of the Busch theorem

K. Floettmann<sup>1,\*</sup> and D. Karlovets<sup>2,†</sup>

<sup>1</sup>Deutsches Elektronen-Synchrotron, Notkestraße 85, 22607 Hamburg, Germany

<sup>2</sup>Tomsk State University, Lenina Ave. 36, 634050 Tomsk, Russia

(Dated: June 24, 2020)

Electron vortex beams offer unique opportunities for the study of chiral or magnetic structures in electron microscopes and of fundamental effects of quantum interference in particle physics. Immersing a cathode in a solenoid field presents a highly efficient and flexible method for the generation of vortex electron beams which is utilized at accelerators, but has not yet been realized in an electron microscope. The conditions for the generation of vortex beams with quantized orbital angular momentum from an immersed cathode in an electron microscope are discussed, and general possibilities of this technique for the production of vortex beams of other charged particles are pointed out.

*Introduction.* – The generation of electron vortex beams – i.e., electron beams carrying a quantized orbital angular momentum (OAM) – in electron microscopes [1–3] has inspired versatile theoretical studies and interesting experiments or proposals to unveil the basic properties of such beams, and to apply them as probes for the study of chiral [4] or magnetic structures [5] and of effects of quantum interference and coherence in particle collisions, inaccessible with ordinary beams [6–11]. The electron microscope community devised several methods to produce and analyze electron vortex beams (for a review see [8]), e.g., by means of spiral phase plates [1], holographic diffraction gratings [2], or by the interaction with a magnetic needle, which mimics an approximate magnetic monopole [12]. The low efficiency and the limited flexibility of these methods hampers however the broad application of vortex beams for explorations of the atomic structure of matter and of fundamental interactions beyond a plane-wave approximation [6–11].

Modern accelerators also make use of beams carrying non-quantized orbital angular momentum, predominantly for the manipulation of the phase-space of a beam [13–16], with the aim to redistribute the phase-space volume between transverse degrees of freedom. The prevailing technique for the generation of vortex electron beams applied in accelerators makes use of a cathode which is immersed in a solenoid field. This immersion of the cathode changes the dynamics of charged particle beams in a very fundamental way. While the angular momentum, which a solenoid imparts onto a beam, is canceled exactly when the beam travels through the complete solenoid, this is not the case when the beam is generated inside the field. In simple words, the beam sees only half of a solenoid in the second case and thus a freely propagating beam with intrinsic angular momentum is generated. The relation between the solenoid field strength on the cathode and the angular momentum of the freely propagating beam outside of the solenoid is de-

scribed by the so-called Busch theorem [17]. The beams created with the use of an immersed cathode carry typically a large average angular momentum with a broad spectral distribution, or OAM bandwidth.

Importantly, this technique can be adapted to the generation of vortex beams, of all kind of charged particles. Besides electron vortex beams, ion beams carrying a non-quantized OAM have already been produced [18], and even radioactive ion beams have been discussed. In Electron Cyclotron Resonance ion sources, particles are for example ionized inside a solenoid field, the extracted ions carry thus naturally an OAM [19]. The solenoid field strength is in this case, however, fixed by the resonance condition and thus is not a free parameter. Another possibility is to immerse a charge stripping foil into a freely adjustable solenoid field [18]. Here the induced OAM is proportional to the charge difference induced by the foil, so that large angular momenta can be reached with moderate magnetic fields. The extension of the principle to, e.g., proton beams or more exotic elementary particle beams is – disregarding technical limitations – straightforward.

In this Letter, we discuss the application of the immersed cathode technique for the generation of vortex beams with a quantized OAM in an electron microscope. While applications in a microscope do not necessarily require the generation of pure modes with a well-defined angular momentum and a vanishing OAM quantum uncertainty (OAM bandwidth), the discussion concentrates on this operation mode to point out the most stringent requirements.

*Classical particle in a solenoid.* – Solenoid fields can – as any rotational symmetric electromagnetic field – be developed in the form of a polynomial series as:

$$\begin{aligned}
 B_z(z, r) &= B_{z,0} - \frac{r^2}{4} B_z'' + \frac{r^4}{64} B_z'''' \dots \\
 B_r(z, r) &= -\frac{r}{2} B_z' + \frac{r^3}{16} B_z''' - \frac{r^5}{384} B_z'''' \dots \\
 B_\theta &= 0.
 \end{aligned} \tag{1}$$

Here,  $B_z$ ,  $B_r$  and  $B_\theta$  are the field components in a cylin-

\*Electronic address: [Klaus.Floettmann@DESY.de](mailto:Klaus.Floettmann@DESY.de)

†Electronic address: [d.karlovets@gmail.com](mailto:d.karlovets@gmail.com)

drical system with the coordinates  $\{r, \theta, z\}$ ,  $B_{z,0}$  denotes the on-axis field and a prime indicates a derivative with respect to the longitudinal axis  $z$ .

The transverse fields of solenoids installed in electron microscopes and accelerators have to be linear within the radius of the total beam size, so as to preserve the beam quality. The discussion will thus concentrate in the following on the first terms of Eqs 1.

The transverse canonical momenta in Cartesian coordinates  $\{x, y, z\}$  are defined as:

$$\begin{aligned}\tilde{p}_x &= p_x + qA_x \cong p_x - \frac{qB_{z,0}}{2}y \\ \tilde{p}_y &= p_y + qA_y \cong p_y + \frac{qB_{z,0}}{2}x,\end{aligned}\quad (2)$$

where the charge  $q$  can be of arbitrary sign,  $p_x$  and  $p_y$  denote the mechanical momenta of a particle, and  $A_x$  and  $A_y$  stand for the vector potential of the field, which is in linear approximation  $A_\theta \cong \frac{r}{2}B_{z,0}$  (cf. 1).

The canonical angular momentum follows as:

$$\begin{aligned}\tilde{L} &= x\tilde{p}_y - y\tilde{p}_x = rp_\theta + qrA_\theta \\ &\approx xp_y - yp_x + \frac{qB_z}{2}(x^2 + y^2)\end{aligned}\quad (3)$$

The canonical angular momentum is a conserved quantity of motion [20]. Note that Eq. 3 is defined with respect to the axis of the solenoid field, which is not the axis of the spiral motion of a particle in an electron microscope or accelerator configuration. Particles entering a solenoid with negligible transverse momentum components and transverse offset  $r$  relative to the solenoid axis, will build up an azimuthal momentum in the fringe field of the solenoid such that they rotate with the radius  $r/2$  around an axis, which has an offset of  $r/2$  to the solenoid axis. Thus all particles will cross the axis of the solenoid after half a period and the beam is being focused.

The vector potential is related to the magnetic flux in a circle of the radius  $r$  by:

$$A_\theta = \frac{1}{2\pi} \oint A_\theta dl = \frac{1}{2\pi} \int (\nabla \times A) ds = \frac{1}{2\pi} \int B ds = \frac{\Phi}{2\pi}, \quad (4)$$

where the integrals cover the circumference and the area of the circle described by  $r$ . Thus

$$\tilde{L} = rp_\theta + \frac{q\Phi}{2\pi} \quad (5)$$

In this form, the conservation of the canonical angular momentum is called Busch theorem [17].

The Busch theorem implies the conservation of the mechanical angular momentum  $L$  for the complete passage through a solenoid, because outside of a solenoid  $\tilde{L} = L = xp_y - yp_x$  holds, i.e., if  $L = 0$  when the beam enters the solenoid, it will exit also with  $L = 0$ . However, when the cathode is immersed in the solenoid field electrons starting with  $L = 0$  on the cathode carry the canonical angular momentum of  $\tilde{L} = \frac{q\Phi}{2\pi}$ , which turns

into the kinetic angular momentum  $rp_\theta = \frac{q\Phi}{2\pi}$  in the field free region.

This transfer is entirely due to the Lorentz force of the radial field components. In the idealized case of a long constant solenoid field and no additional forces, the particles would move on straight lines parallel to the solenoid field lines until the fringe field region is reached. Neither in the case of the immersed cathode nor in the case of the non-immersed cathode, does the beam trajectory encircle the area which enters the integrals in Eq. 4.

*Quantum particle in a solenoid.* – Let us consider now a quantum wave packet of a charged particle emitted with a vanishing kinetic angular momentum from a cathode (or an anode), which is immersed in a solenoid field. Following Dirac [21], its canonical angular momentum is quantized with an integer quantum number  $\ell$  as

$$\tilde{L} = \ell\hbar = \frac{q\langle\Phi\rangle}{2\pi} \quad (6)$$

and so is the mean flux of the magnetic field, which reads as

$$\langle\Phi\rangle = \left\langle \oint \mathbf{A} dl \right\rangle = \frac{4\pi}{|q|} \hbar \frac{\langle r^2 \rangle}{r_H^2}, \quad (7)$$

where  $\langle \dots \rangle$  denotes a quantum-mechanical averaging and  $r_H^2 = 4\hbar/|q|B_{z,0}$ .

Thus, the electron packet acquires a quantized orbital angular momentum when leaving the solenoid field. Eqs (6) and (7) represent a quantum counterpart of the classical Busch theorem. Due to similarities of the fringe fields of the solenoid and those of a tip of a magnetic needle, the effect is somewhat analogous to that arising from the interaction with an effective magnetic monopole [12] – the electron's wave function gets an Aharonov-Bohm phase,

$$\Psi \rightarrow \Psi \exp \left\{ i\theta \frac{q}{2\pi\hbar} \left\langle \oint \mathbf{A} dl \right\rangle \right\} = \Psi e^{i\ell\theta}. \quad (8)$$

As can be seen, the sign of the resultant angular momentum  $\ell$  is correlated with the sign of the particle's charge and with the sign of the magnetic flux.

For an electron with  $q = -e$ , a convenient estimate of the intrinsic angular momentum acquired by the electron is given by:

$$|\ell| \approx 1.5 \times 10^{-3} \langle r^2 \rangle [\text{nm}^2] B_{z,0} [\text{T}], \quad (9)$$

where  $\sqrt{\langle r^2 \rangle}$  is measured in nanometers and the magnetic field  $B_{z,0}$  in Tesla. Formally, the estimate (9) coincides with its classical counterpart [16] but  $\langle r^2 \rangle$  is the rms width of a single-particle wave packet now, not that of a classical beam of many particles.

*Discussion* – In accelerator physics, beams with angular momentum are generally not desirable, because the

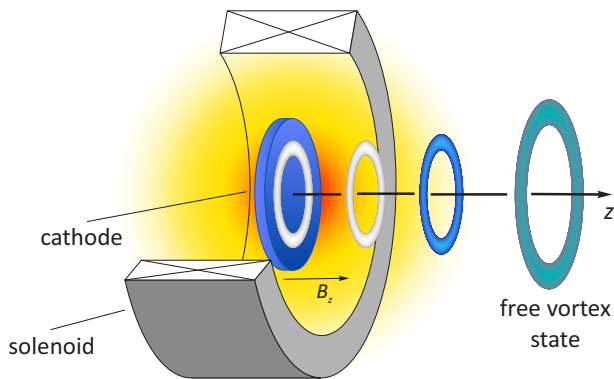


FIG. 1: Illustration of the immersed cathode technique. Electrons with a ring-shaped probability density are released from a cathode which is immersed in a solenoid field. When the electrons leave the solenoid field an orbital angular momentum is imparted and a free vortex state is generated.

angular momentum leads to an additional beam divergence and thus the beam quality is degraded. In many particle sources it is however necessary to place the first focusing solenoid lens so close to the cathode that the fringe field extends up to and behind the cathode. These sources are equipped with a so-called bucking coil, i.e., a solenoid behind the cathode plane which is excited with opposite polarity to the focusing lens in order to compensate the longitudinal field component on the cathode. In such a configuration the angular momentum of the beam can be easily modified by adjusting the current in the bucking coil.

A combination of a focusing lens and the bucking coil was also the basis for the intensive experimental program on vortex beams at the FNAL photoinjector [16, 22–24]. The experiments demonstrated the generation of angular momentum dominated beams and the repartitioning of the beam emittance in a so-called flat-beam adapter [25]. A comparison of this beam adapter to the mode converter known for laser beams is discussed in a parallel publication to this report [26].

In a photoinjector, the cathode consists of a photo emissive material. Electrons are released by directing a laser beam onto the cathode. Usually a uniform emission within a specified radius is aimed for, which can be described as a superposition of Laguerre-Gaussian beams [27]. Thus a corresponding broad spectrum of angular momenta is generated. In the experiments at FNAL, average angular momenta of  $\sim 100$  neV $\times$ s have been measured [16], corresponding to  $\sim 10^8 \hbar$ . The rms beam size on the cathode in these experiments was in the millimeter range and a solenoid field of about 0.1 T was applied on the cathode, in accord with Eq.(9). Beams with such a high angular momentum could hardly be handled in an electron microscope and the observation of quantum effects, e.g., discontinuous quantum steps, are rather unlikely at too high values of the OAM. Thus, a pure mode with a much lower quantum number is de-

sirable for experimental conditions in which quantization could be observed.

According to the corresponding uncertainty relations [28], the generation of a pure mode requires the emission from a ring, centered to the axis of the solenoid, as illustrated in Figure 1. This can be realized, e.g., by directing a Laguerre-Gauss mode laser onto the photo cathode immersed in the solenoid field. In case of a mode with a radial mode number  $n = 0$ , the mode consists of a single ring with a nearly Gaussian cross-section of the ring. Electrons would thus naturally be emitted into the transverse distribution of a Laguerre-Gauss mode. Alternatively, a micro-structured photo cathode with a ring-shaped emissive area on a non-emissive background could be envisaged. Also field emission, for example from a ring of field emitting tips, is not excluded. In the latter cases the emission would not match the transverse distribution of a Laguerre-Gauss ring; however, it is conceivable to realize even smaller structures, than by means of a focused laser beam.

Besides the spatial transverse distribution, the uncorrelated transverse beam momentum distribution also needs to be matched to the phase-space of a Laguerre-Gauss mode. The uncorrelated momentum spread of a Laguerre-Gauss mode increases with the increasing angular momentum as  $\sigma_{px} = \hbar \frac{|\ell|+1}{2\sigma_x}$ , where  $\sigma_x$  is the transverse rms beam size and  $|\ell| + 1$  corresponds to the beam quality factor. This momentum spread should be large in comparison to the natural momentum spread of the electrons, which is at the cathode in the range of 0.2 and 0.4 keV/c for the typical kinetic emission energies of 0.2 - 0.5 eV [29]. Photo emitted electrons ( $\sim 0.5$  eV kinetic energy) are worse by a factor of 2-3 compared to field emitted electrons for typical photocathodes, but photo emission offers a much higher flexibility for shaping the transverse distribution and the size of the emitting area than field emission (the higher brightness of field emitted electron beams is primarily due to the small emission size). Lower transverse momenta can be reached by cryogenically cooled cathodes and by special photocathode materials as for example GaAs [30], which would also offer the possibility to produce spin polarized electrons.

If the transverse rms beam size of a ring shaped laser beam on the photocathode were in the micrometer range,  $|\ell|$  would still need to be larger than  $10^3$  to increase the divergence of the Laguerre-Gauss mode over the natural divergence of the electrons. According to Eq.(9), the required magnetic field on the cathode would be in the range of 1 T in this case. The conditions of a pure mode, i.e., the momentum spread of the mode is larger than the natural momentum spread of the electrons, can be easier realized with lower magnetic fields and larger ring radii, if larger OAM values are acceptable. Deviations from the pure mode conditions due to a mismatch of the transverse shape or momentum lead, however, only to a population of neighboring modes, a beam with angular momentum is created in any case.

The generation of pure modes with a low quantum

number from an immersed cathode is challenging and would likely require a cryogenically cooled, structured photocathode, which delivers electrons with transverse momentum spread well below 0.2 keV/c and ideally small, high field solenoids ( $B_{z,0} > 1$  T), as can be generated by superconducting coils. Note that the high field values are only required in a very small volume with a transverse size of the order of the wave packet's width, so that the generation of significant fields is conceivable with reasonable effort. GaAs photocathodes would offer an additional opportunity to produce spin polarized electrons, however, with regard to surface preparation and vacuum conditions, the material is quite demanding. The generation of mixed modes with a large OAM bandwidth on the other hand is straightforward. Beams with a large OAM bandwidth can be useful for studying quantum entanglement, as discussed, for instance, in [31] and they appear also to be acceptable for some of the proposed applications of angular momentum beams. Some electron microscopes are already equipped with a photocathode laser, so that only the cathode geometry needs to be adapted and a solenoid needs to be installed.

A big advantage of the immersed cathode technique – besides its high efficiency – is its high flexibility. For a fixed geometry of the ring-shaped emission only the mag-

netic field has to be controlled. The angular momentum can be freely adjusted according to Eq.(9) and it can easily be reversed, which is mandatory for some of the proposed applications.

Above, the conditions at the cathode were discussed, while one would rather like to reach the ideal matching conditions in the fringe field region, where the angular momentum is imparted onto the beam. Optical imaging of the cathode plane into the plane of the fringe field might be necessary. Neither acceleration, nor a magnification of the cathode image will change the conditions concerning the uncorrelated transverse momenta, as discussed above. Thus, the use of the cathode in the solenoid field opens a simple route for the generation and manipulation of the electron vortex beams with quantized angular momentum in electron microscopes, and the adaptation of this technique to other charged particles is straightforward.

### Acknowledgments

We are grateful to P. Kazinski, V. Serbo, and A. Surzhykov for useful discussions.

- 
- [1] M. Uchida, A. Tonomura, 'Generation of electron beams carrying orbital angular momentum', *Nature* **464**, 737–739 (2010).
- [2] J. Verbeeck, H. Tian, P. Schattschneider, 'Production and application of electron vortex beams', *Nature* **467**, 301–304, (2010).
- [3] B. J. McMorran, A. Agrawal, I. M. Anderson, A. A. Herzog, H. J. Lezec, J. J. McClelland, J. Unguris, 'Electron vortex beams with high quanta of orbital angular momentum', *Science* **331**, 192 (2011).
- [4] R. Juchtmans, J. Verbeeck, 'Orbital angular momentum in electron diffraction and its use to determine chiral crystal symmetries', *Phys. Rev. B* **92**, 134108, (2015).
- [5] S. Lloyd, M. Babiker, J. Yuan, 'Quantized Orbital Angular Momentum Transfer and Magnetic Dichroism in the Interaction of Electron Vortices with Matter', *Phys. Rev. Lett.* **108**, 074802 (2012).
- [6] I. P. Ivanov, 'Measuring the phase of the scattering amplitude with vortex beams', *Phys. Rev. D* **85**, 076001 (2012).
- [7] D. V. Karlovets, 'Scattering of wave packets with phases', *J. High Energy Phys.* **03**, 049 (2017).
- [8] K. Y. Bliokh, I. P. Ivanov, G. Guzzinati, L. Clark, R. van Boxem, A. B  ch  , R. Juchtmans, M. A. Alonso, P. Schattschneider, F. Nori, J. Verbeeck, 'Theory and applications of free-electron vortex states', *Physics Reports* **690**, 1–70, (2017).
- [9] D. V. Karlovets, V. G. Serbo, 'Effects of the transverse coherence length in relativistic collisions', *Phys. Rev. D* **101**, 076009 (2020).
- [10] I. P. Ivanov, N. Korchagin, A. Pimikov, P. Zhang, 'Doing Spin Physics with Unpolarized Particles', *Phys. Rev. Lett.* **124**, 192001 (2020).
- [11] I. P. Ivanov, N. Korchagin, A. Pimikov, P. Zhang, 'Twisted particle collisions: A new tool for spin physics', *Phys. Rev. D* **101**, 096010 (2020).
- [12] B  ch  , R. van Boxem, G. van Tendeloo, J. Verbeeck, 'Magnetic monopole field exposed by electrons', *Nature Physics* **10**, 26–29 (2014).
- [13] A. Burov, S. Nagaitsev, A. Shemyakin, Y. Derbenev, 'Optical principles of beam transport for relativistic electron cooling', *Phys. Rev. ST Accel. Beams* **3**, 094002 (2000).
- [14] A. Burov, S. Nagaitsev, Y. Derbenev, 'Circular modes, beam adapters, and their applications in beam optics', *Phys. Rev. E* **66**, 016503 (2002).
- [15] K.-J. Kim, 'Round-to-flat transformation of angular-momentum-dominated beams', *Phys. Rev. ST Accel. Beams* **6**, 104002 (2003).
- [16] Y.-E. Sun, P. Piot, K.-J. Kim, N. Barov, S. Lidia, J. Santucci, R. Tikhoplav, J. Wennerberg, 'Generation of angular-momentum-dominated electron beams from a photoinjector', *Phys. Rev. ST Accel. Beams* **7**, 123501 (2004).
- [17] H. Busch, 'Berechnung der Bahn von Kathodenstrahlen im axialsymmetrischen elektromagnetischen Felde', *Ann. Phys.* **386**, 974 (1926).
- [18] S. Appel, L. Groening, Y. El Hayek, M. Maier, C. Xiao, 'Injection optimization through generation of flat ion beams', *NIM A* **866**, 36 (2017).
- [19] P. Bertrand, J. L. Biarrotte, D. Uriot, 'Flat Beams and Applications to the Mass Separation of Radioactive Beams', *Proc. of the European Particle Accelerator Conference EPAC 2006, Edinburgh* (2006).

- [20] L. Brillouin, 'A Theorem of Larmor and Its Importance for Electrons in Magnetic Fields', *Phys. Rev.* **67**, 7&8, (1945).
- [21] P. A. M. Dirac, 'Quantised Singularities in the Electromagnetic Field', *Proc. R. Soc. Lond. Ser. A* **133**, 821, (1931).
- [22] D. Edwards, H. Edwards, N. Holtkamp, S. Nagaitsev, J. Santucci, R. Brinkmann, K. Desler, K. Flöttmann, I. Bohnet, M. Ferrario, 'The Flat beam experiment at the FNAL photoinjector', *Proc. of Linear Accelerator conference LINAC 2000, Monterey* (2000).
- [23] D. Edwards, I. Bohnet, R. Brinkmann, K. Desler, H. Edwards, M. Ferrario, K. Flöttmann, N. Holtkamp, S. Nagaitsev, J. Santucci, 'Status of Flat Electron Beam Production', *Proc. of Particle Accelerator Conference PAC 2001, Chicago* (2001).
- [24] P. Piot, Y.-E Sun, K.-J. Kim, 'Photoinjector generation of a flat electron beam with transverse emittance ratio of 100', *Phys. Rev. ST Accel. Beams* **9**, 031001(2006).
- [25] R. Brinkmann, Ya. Derbenev, K. Flöttmann, 'A low emittance, flat-beam electron source for linear colliders', *Phys.Rev. ST Accel. Beams* **4**, 053501 (2001).
- [26] K. Floettmann, 'Equivalence of Gouy and Courant-Snyder Phase', submitted for publication.
- [27] F. Gori, 'Flattened gaussian beams', *Optics Communications* **107**, 335 (1994).
- [28] P. Carruthers, M.M. Nieto, 'Phase and angle variables in quantum mechanics', *Rev. Mod. Phys.* **40**, 411 (1968).
- [29] D. Ehberger, J. Hammer, M. Eisele, M. Krüger, J. Noe, A. Högele, P. Hommelhoff, 'Highly Coherent Electron Beam from a Laser-Triggered Tungsten Needle Tip', *Phys. Rev. Lett.* **114**, 227601 (2015).
- [30] S. Pastuszka, M. Hoppe, D. Kratzmann, D. Schwalm, A. Wolf, A. S. Jaroshevich, S. N. Kosolobov, D. A. Orlov, A. S. Terekhov, 'Preparation and performance of transmission-mode GaAs photocathodes as sources for cold dc electron beams', *Jour. of App. Phys.* **88**, 6788 (2000).
- [31] J. P. Torres, A. Alexandrescu, and L. Torner, 'Quantum spiral bandwidth of entangled two-photon states', *Phys. Rev. A* **68**, 050301(R) (2003).